

VT1510-12

Formerly NPS-12D5. Use with Ventex AC Adapter**

FEATURES

- UL and cUL listed to UL 2161
- Small size and lightweight
- Low-voltage input
- Use with argon and neon
- Use standard gas pressure
- Constant burn




SPECIFICATIONS

| | |
|---|--------------------------------|
| Input Voltage | 11 to 14VDC |
| Input Current | 600mA rms (80%) 900mA rms max. |
| Output Voltage | 0V-1,500V |
| Output Current | 15mA |
| Operating Temperature | 32°F to 104°F / 0°C to 40°C |
| Driving Distance* (Based on Standard 12mm tube. Deduct one foot from driving footages for each pair of electrodes.) | |
| Neon | 2-5 ft (0.6-1.5 m) |
| Mercury | 2-6 ft (0.6-1.8 m) |

*See Ventex Luminous Tube Footage Chart for more information.

DIMENSIONS

| | | |
|---------------|---------|---------|
| Length (A) | 2.20 in | 5.6 cm |
| Width (B) | 2.25 in | 5.7 cm |
| Height (C) | 1.10 in | 2.8 cm |
| Mounting (D) | 1.75 in | 4.5 cm |
| Mounting (E) | 1.15 in | 2.9 cm |
| Weight | 3.2 oz | 91 g |
| Primary Leads | 8.0 in | 20.3 cm |
| GTO Leads | 18.0 in | 45.7 cm |

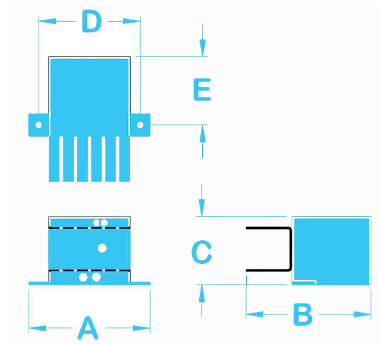

Male connector to mate with wall adapter power supply.

**Ventex AC Adapter is found on Page 26 of this catalog.